


## Solid State Relay




### Features:

- LED indicator
- Internally mounted snubber circuit protection for huge current application
- Zero Crossing turn-on
- Zero Current turn-off
- Photo-isolation, 4000V rms isolation.
- Operating Temperature -20c to 80C
- Capacitance 15 pf (Max)
- Response time 1/2 cycle + 1 msec.

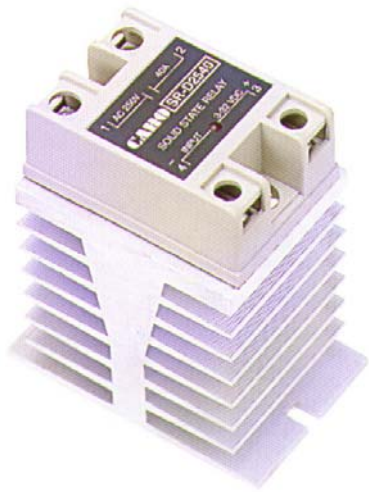

SSR Shown with optional heatsink



### Available Models: (All 250Vac Output NO Contact)

Amperage DC Input 3-32VDC AC Input 90-250VAC

10A	SRD2510	SRA2510
25A	SRD2525	SRA2525
40A	SRD2540	SRA2540

HEATSINK PICTURED PART # HS-A (50mm Tall)

